



COMPACT 50L
SMART THINGS COME IN SMALL PACKAGES

Designed to be everything you asked for in a compact water heater, the 50 Litre Electric is MEPS compliant.

We solved the access problem by relocating all the service outlets to the front and unlike some units, ours have remained smaller in size.




160L SQUAT
A BIG TANK MADE FOR SHORT SPACES

The AquaMAX commitment to innovation continues with the 160 Litre Electric Squat. An Electric Water Heater that brings larger capacity to awkward indoor spaces. With dual inlets and outlets, the 160 Litre Electric Squat brings reliable delivery in a smarter package.



250L-400L ELECTRICS
BIG DELIVERY, LOWER RUNNING COSTS

The AquaMAX large Electric water heater range provides an option to take advantage of lower cost off-peak tariffs.² Built with dual inlets and outlets (like the rest of the range), the 250-400 Litre Electric range is available in single or twin element models.

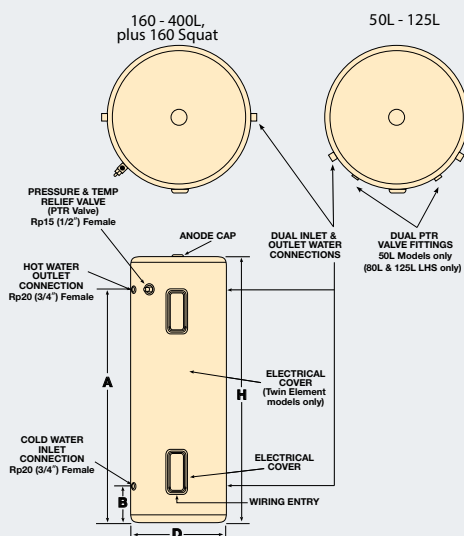

| Water Heater Dimensions (mm) | H | A | B | D |
|------------------------------|------|------|-----|-----|
| 991050 | 695 | 539 | 142 | 400 |
| 981080 | 875 | 669 | 194 | 460 |
| 981125 | 1242 | 1047 | 195 | 480 |
| 991160 | 1610 | 1436 | 104 | 480 |
| 9W1160 | 965 | 755 | 113 | 640 |
| 991250/992250 | 1395 | 1190 | 73 | 640 |
| 991315/992315 | 1640 | 1430 | 113 | 640 |
| 991400/992400 | 1840 | 1600 | 121 | 690 |

Aquamax Australia Pty Ltd 463-467 Warrigal Road Moorabbin Vic 3189 Toll Free: 1800 676 000
Ph: (03) 9532 2200 Sales Fax: 1800 639 844 Service Fax: (03) 9556 5534 A.B.N. 37 138 189 689
Email: sales@aquamax.com.au For more information visit www.aquamax.com.au



“AquaMAX Electric Water Heaters... giving you more in hot water”

Stay in hot water with AquaMAX.

Award winning AquaMAX high efficiency Electric Water Heaters provide your family with all the hot water they need.

AquaMAX Mains Pressure Electric Water Heaters are built using the latest technology and backed by a **10 or 5 year** cylinder warranty.¹ They are available in sizes to suit most applications.

AquaMAX Electric Water Heaters are made for Aussie conditions, to suit both metro and regional areas.

FAMILIES BIG AND SMALL

AquaMAX Electric Mains Pressure Water Heaters provide families big and small with reliable hot water. AquaMAX inhouse factory testing ensures every new system we build meets our exacting standards whether it's installed indoors or outdoors. You can also take advantage of lower cost off-peak tariffs for added savings on your energy bills.²

HOW DO WE MAKE THEM ACHIEVE OUR STANDARD?

After our cylinders have been fully welded, we apply a high quality enamel coating using the latest multi-head spray equipment to create our enamel lining. Combined with a sacrificial anode and protected by a steel casing with rounded edges, every AquaMAX Electric Water Heater is backed by a 10 or 5 year cylinder warranty.¹



Electric Specifications

| | 400 Litre | | | 315 Litre | | | | 250 Litre | | | | 160 Litre Squat | | 160 Litre | | | 125 Litre | | | 80 Litre | 50 Litre | |
|--------------------------------------|-----------|----------|----------|-----------|----------|----------|----------|-----------|-------------|----------|----------|-----------------|----------|-----------|----------|----------|-----------|-------------|----------|----------|----------|---|
| | 991400C7 | 991400C8 | 992400C8 | 991315C7 | 991315C8 | 992315C7 | 992315C8 | 991250C7 | 991250C7/BL | 991250C8 | 992250C7 | 9W1160C4 | 9W1160C5 | 991160C4 | 991160C5 | 991160C7 | 981125C4 | 981125C4/BL | 981125C7 | 981080C7 | 991050C7 | |
| Number of People Served | 5-9 | | | 4-6 | | | | 3-5 | | | | 2-4 | | 2-4 | | | 2-3 | | | 1-2 | 1 | |
| - Continuous/Time of Use Tariff | 5-9 | | | 4-6 | | | | 3-5 | | | | 2-4 | | 2-4 | | | 2-3 | | | 1-2 | 1 | |
| - Off peak/night rate | 4-6 | | | 2-4 | | | | 1-3 | | | | - | | - | | | - | | | - | - | |
| Hot Water Delivery Litres | 400 | | | 315 | | | | 250 | | | | 160 | | 160 | | | 125 | | | 80 | 50 | |
| Boost Capacity (Twin Element) Litres | - | 90 | | - | 50 | | | - | 50 | | | - | | - | | | - | | | - | - | |
| Weight (empty) kg | 118 | | | 97 | | | | 76 | | | | 63 | | 55 | | | 44 | | | 32 | 26 | |
| Maximum Loading Watts | 3600 | 4800 | 4800 | 3600 | 4800 | 3600 | 4800 | 3600 | 3600 | 4800 | 3600 | 1800 | 2400 | 1800 | 2400 | 3600 | 1800 | 1800 | 3600 | 3600 | 3600 | |
| Heating Element Upper Watts | - | 4800 | | - | 3600 | | | 4800 | | | | - | - | | - | | | - | | | - | - |
| Heating Element Lower Watts | 3600 | 4800 | 4800 | 3600 | 4800 | 3600 | 4800 | 3600 | 3600 | 4800 | 3600 | 1800 | 2400 | 1800 | 2400 | 3600 | 1800 | 1800 | 3600 | 3600 | 3600 | |

Specifications

| | 991400 | 991315 | 991250 | 9W1160 | 991160 | 981125 | 981080 | 991050 |
|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Voltage (single phase) | 240Vac | 240Vac | 240Vac | 240Vac | 240Vac | 240Vac | 240Vac | 240Vac |
| Maximum Supply Pressure | | | | | | | | |
| with expansion control valve (ECV) | 680 kPa | 680 kPa | 960 kPa | 680 kPa | 960 kPa | 680 kPa | 960 kPa | 960 kPa |
| without expansion control valve (ECV) | 800 kPa | 800 kPa | 1120 kPa | 800 kPa | 1120 kPa | 800 kPa | 1120 kPa | 1120 kPa |
| Pressure & Temp Relief Valve | 1000 kPa | 1000 kPa | 1400 kPa | 1000 kPa | 1400 kPa | 1000 kPa | 1400 kPa | 1400 kPa |
| ECV setting | 850 kPa | 850 kPa | 1200 kPa | 850 kPa | 1200 kPa | 850 kPa | 1200 kPa | 1200 kPa |
| Thermostat setting (Maximum) | 70°C | 70°C | 70°C | 70°C | 70°C | 70°C | 70°C | 75°C |
| Hot & Cold Water connection | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female | Rp 3/4" (20mm) Female |
| Warranty (Cylinder) ¹ | 10 years* | 10* or 5 years | 5 years | 5 years | 5 years | 5 years | 5 years | 5 years |
| Warranty (Parts & Labour) ¹ | 1 year | 1 year | 1 year | 1 year | 1 year | 1 year | 1 year | 1 year |
| Protection rating | IP24 | IP24 | IP24 | IP24 | IP24 | IP24 | IP24 | IP24 |

* 10 year cylinder warranty applies to 991400, 992400, 991315, 992315, 991250 & 992250 models manufactured on or after 20/11/2017.

Due to constant product improvements, the specifications are subject to change without notice.

¹ 10 year cylinder warranty applies to 250L, 315L and 400L models manufactured on or after 20/11/2017. Full warranty details available on request from AquaMAX. Call Toll Free 1800 676 000 or view at www.aquamax.com.au

² Please refer to your energy provider